

ARSFEO

ANTISTATEX® RANGE



ARSFEO is specially suited for sanding soft resinous wood, such as Pine and Spruce.

The silicon carbide grain coating of ARSFEO will create an even and flat surface with a particularly fine finish, which minimizes the cost for subsequent surface treatment.

The Antistatex® bonding system provides a full antistatic effect which together with an extra open coat grit distribution minimizes clogging problems.

TECHNICAL SPECIFICATION

Backing:	F-weight paper
Bonding:	Resin over resin
Treatment:	Fully Antistatic - Antistatex®
Grit:	Silicon Carbide
Coating:	Extra open
A-range:	P60 - P150
B-range:	P40 - P50
Width:	1370 mm, 1420 mm on request

APPLICATIONS

Calibrating and intermediate sanding of solid wood and board.


Wood: Soft wood

Board: MDF, HDF and Particle board

Lacquer: —

Specials: —

RECOMMENDED FORMS

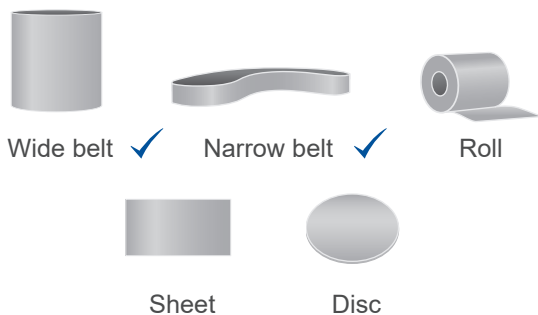

EKAMANT

SWEDISH QUALITY COATED ABRASIVES

Ekamant AB, Järnvägsgatan 44, SE-285 23 Markaryd, Sweden / www.ekamant.com