

ARSG

ANTISTATEX® RANGE



ARSG has a coating of silicon carbide, and in combination with a strong G-weight paper. This is a product excellent for segment belts, but also used for one joint belt when extra strong backing is required.

The Antistatex® bonding system provides a full antistatic effect which reduces clogging of the product and minimizes dust load on the sanded surface.

TECHNICAL SPECIFICATION


Backing:	G-weight paper
Bonding:	Resin over resin
Treatment:	Fully Antistatic - Antistatex®
Grit:	Silicon Carbide
Coating:	Semi open
A-range:	P60 - P180
B-range:	—
Width:	1370 mm

APPLICATIONS

Excellent for sanding all types of board. Can be use both for one joint belts and segment belts.

Wood:	Calibration of wood
Board:	MDF, HDF and Particle board
Lacquer:	—
Specials:	Cement board

RECOMMENDED FORMS

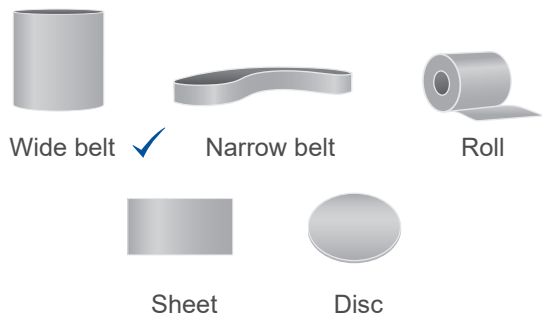

EKAMANT

SWEDISH QUALITY COATED ABRASIVES