

# EKA 1000 EN

## ANTISTATIC PAPER BACKING RANGE



EKA 1000 EN with there excellent cutting action of the aluminium oxide grain enables an efficient sanding operation.

The antistatic paper backing in combination with Stearate layer, reduces clogging problems and improves the lifetime of the product.

**Note:** This product is only available as B-Range product.

### TECHNICAL SPECIFICATION

<b>Backing:</b>	E-weight paper
<b>Bonding:</b>	Resin over resin
<b>Treatment:</b>	Antistatic paper backing with Stearate layer
<b>Grit:</b>	Aluminium Oxide
<b>Coating:</b>	Semi open
<b>A-range:</b>	—
<b>B-range:</b>	P240 - P320, P 400 - P600
<b>Width:</b>	1370 mm

### APPLICATIONS

Product for finishing sanding.


**Wood:** —

**Board:** MDF and HDF

**Lacquer:** Hard UV-lacquer for flooring

**Specials:** Melamine foil

### RECOMMENDED FORMS

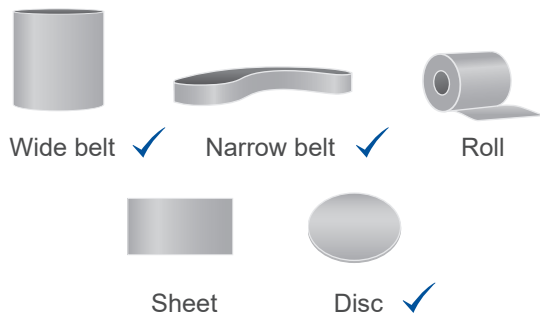

**EKAMANT**  
SWEDISH QUALITY COATED ABRASIVES